



## Output Ratings

Generating Set Model	J60	J65E
380 - 415V, 50 Hz	60.0 kVA 48.0 kW	65.0 kVA 52.0 kW

Ratings at 0.8 pf

## Ratings Definitions

### Prime Power - Model J60

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

### Standby Power - Model J65E

These ratings are applicable for supplying continuous electrical power (at variable load) in event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO8528-3).

## Technical Data

Model:	J60 / J65E
Engine Model:	1103A-33TG2
Alternator Model: FGW (Le Roy Somer)	LL2014H (LSA 43.2L6)
Number of Cylinders:	3 in line
Displacement: Litres (Cu.in)	3.3 (201.4)
Bore/Stroke: mm (in)	105.0 (4.1) / 127.0 (5.0)
Compression Ratio:	17.25:1
Induction:	Turbocharged
Frequency:	50Hz
Engine Speed:	1500 RPM
Maximum continuous Power at Flywheel: kW (hp)	60.5 (81.0)
BMEP: KPA (psi)	1467.0 (212.8)
Piston Speed: m/sec (ft/sec)	6.4 (20.8)
Fuel Tank Capacity: Litres (US Gal)	175.0 (46.2)
Fuel Consump, J60: L/hr (Usg/hr)	13.8 (3.6)
Fuel Consump, J65E: L/hr (Usg/hr)	15.1 (4.0)
Heat Rejected to Exhaust System: kW (Btu/min)	45.5 (2588.0)
Heat Rejected to Water & Lube Oil: kW (Btu/min)	37.7 (2144.0)
Heat Radiated to Room: kW (Btu/min)	16.7 (950.0)
Exhaust Gas Temperature: °C (°F)	TBA
Cooling Air Flow: m3/min (cfm)	TBA
Combustion Air Flow: m3/min (cfm)	3.9 (138)
Exhaust Gas Flow: m3/min (cfm)	TBA

Note: Standard reference conditions 27°C (80°F) Air Inlet Temp, 152.4m (500ft) A.S.L. 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.


## Dimensions and Weights

Length: mm (in)	Width: mm (in)	Height: mm (in)	Dry: kg (lb)	Wet: kg (lb)
2149 (84.6)	752 (29.6)	1366 (53.8)	940 (2072)	960 (2116)

Dry = With Lube Oil

Wet = With Lube Oil and Coolant

Generating set pictured may include optional accessories

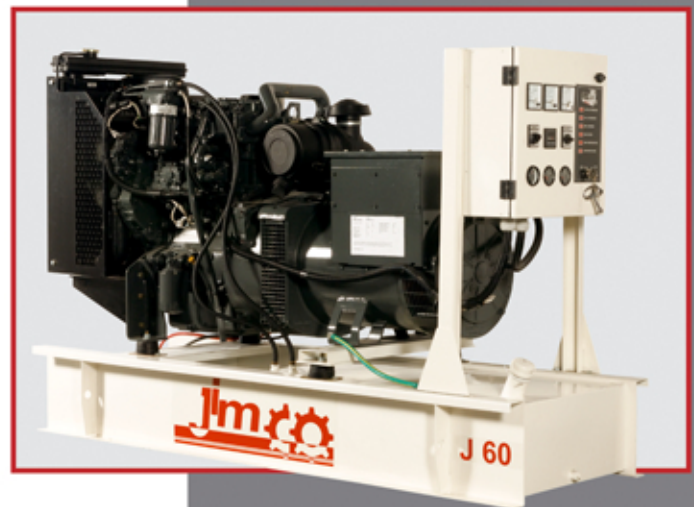

# J60/J65E



ISO 9001:2000

In line with our policy of continuous product development, we reserve the right to change specification without notice.

BEIRUT Head Office Riad El Solh, Chaker & Oweini Bldg. Gr. Floor  
Tel/Fax 01 985647 /48 /49 /50

Showroom Airport Bridge, Aidibi Center  
Tel/Fax 01 840209 /224 /228

Maintenance 24hrs service. Tel 03 721684

Factory Bchamoun, Zouhour street,  
previously Coca Cola Warehouses  
Tel 05 806141 /2

SIDON Tel 03 721684

Website www.jubaili.com E-mail info@jubaili.com