

## SSP-1 Acoustic Enclosure

7.5-180 KVA Range



### Enclosures Data

JIMCO fully weather and soundproof enclosure has gained a well-known reputation through its relatively medium size and good capabilities for noise reduction. Extremely durable, the enclosures are designed to resist corrosion and handling damage.

- High Sound absorbing, heavy duty acoustical fireproof fiber used for general, thermal, and acoustic insulation, covered with galvanised perforated sheet for protection.
- Residential exhaust muffler to further decrease the sound level of the exhaust (mounted inside the enclosure up to 200 KVA as standard).
- Galvanized hinges & door locks stainless steel door locks for 800 KVA and below.
- Polyurethane paint with resistant to sun radiations and various weather conditions. It is tested according to ISO 9001:2000 & European Standards.

### Security and Safety

- Easy and Secure access to control panel, fuel fill and battery
  - Emergency stop button mounted on exterior, convenient to control panel
- Cooling fan and battery charging alternator, when installed, are fully guarded

### Excellent Service and Maintenance Access


- Doors positioned for optimum access to frequently serviced items
- Easy access for filling radiator inside the enclosure
- Lube oil drained to enclosure exterior
- Easy access for electrical control panel, through enclosure door.

### Transportability


- Lifting and drag points facilitating handling from both sides
- Single lifting points are on top of the enclosure

### Soundproof Enclosure Technical Data

	SL-(1m) (Sound Level*) dBa	SL-(3m) (Sound Level*) dBa	TL-(cm) Total Length	TW-(cm) Total Width	TH-(cm) Total Height	W-(Kg) Weight**
J9	68	65	210	85	180	750
J13	68	65	210	85	180	825
J20	68	65	210	85	180	967
J30	68	65	250	100	185	1374
J45	68	65	295	100	185	1643
J60	68	65	295	100	185	1693
J80	68	65	340	100	215	1949
J100	68	65	340	100	215	2093
J135	68	65	390	115	215	2537
J150	68	65	390	115	215	2997
J180	68	65	455	170	235	3689

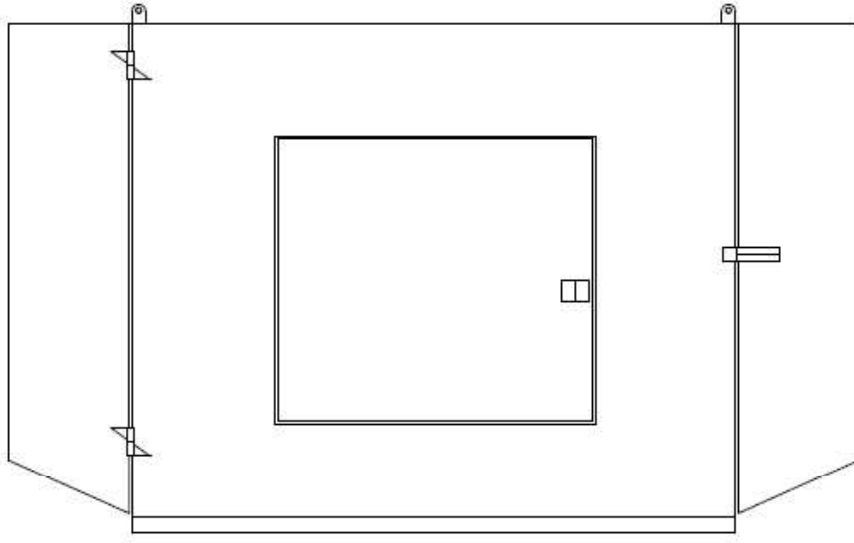

**Side View**

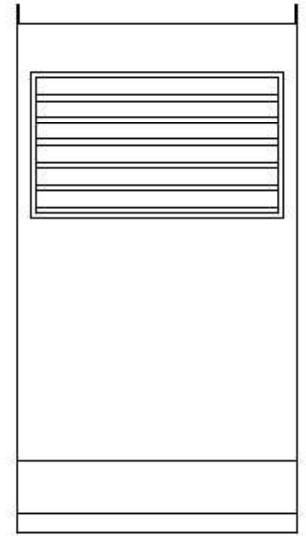

**Front View**